


**Socket Pin for Making Terminal Board**

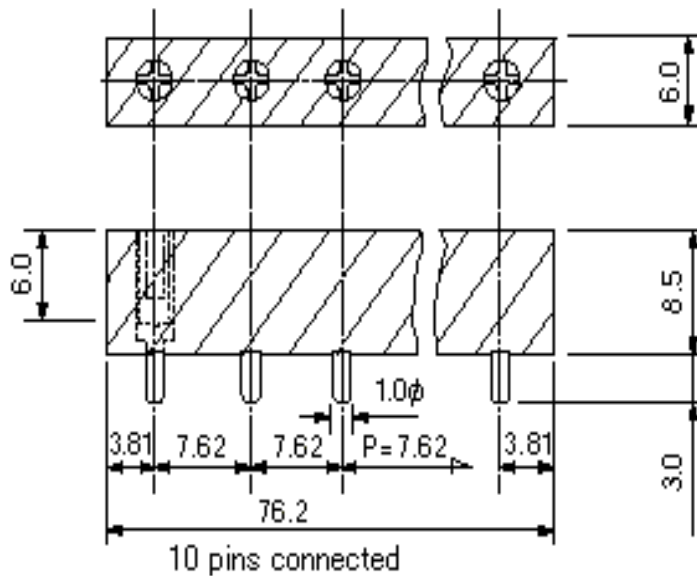

- This is the socket for 2.0 phi mm plug.
- Use for supply of signal line, power source, etc. to PCB.
- Contact Resistance....20m ohm or less
- Dielectric Strength....1000V AC, DC 1min
- Finish....Pin part..Au plating over Ni
- Insulation Resistance....500M ohm or more
- Material....
- Resin part..PBT black (UL94V-0)
- Pin part..Phosphorus bronze
- Mating Force (1 pin)....800g or less
- Mating/unmating (durability)....1000 or more
- Rated Current....10A
- Recommended Male Pin Diameter (phi mm)....2.0
- Recommended Through-hole Diameter (phi mm)....1.2
- Temperature Range (Degrees Celcius)....-40 to +125
- Unmating Force (1 pin)....100g or more

**High Torque Distribution Ltd**, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

**VAT Number:** GB817097808 **Company Registration Number:** SC249029