


Connector, Parallel Mounting Type (Pitch=1.27, 2.54mm)

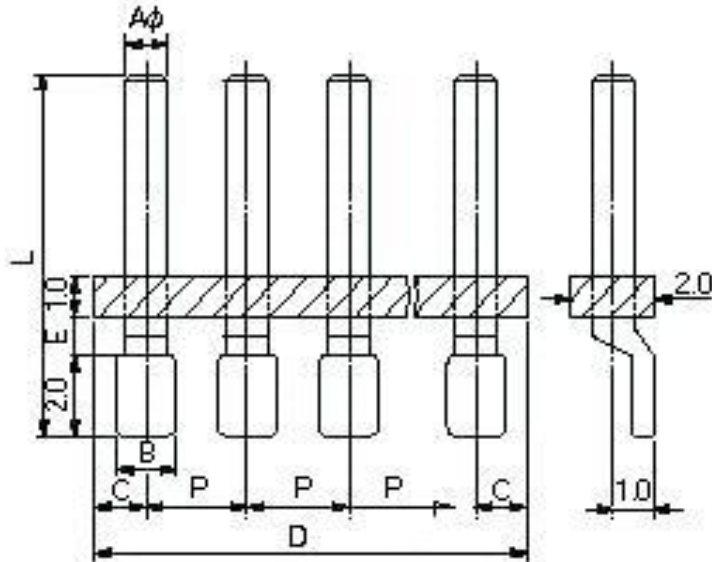

- Mount this parallel to SMT board.
- Use as a leg of power supply for Aluminum board, Iron board, Ceramics board.
- Reflow type
- Current Rating....
 - HD-1 series..2A
 - HD-2 series..3A
 - HD-4 series..5A
- Dielectric Strength....
 - 1000V AC, DC 1min
 - 700V AC, DC 1min (HD-x-1x series only)
- Finish....Au plating over Ni
- Insulation Resistance....500M ohm or more
- Material....
 - Pin part..Brass
 - Resin part..PCT black (UL94V-0)
- Voltage Rating....125V AC, DC

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.
Telephone: +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz
Web: www.hightorquefasteners.co.uk

VAT Number: GB817097808 **Company Registration Number:** SC249029

Fastener and Component Solutions

N/O	A (phi mm)	B (mm)	C (mm)	D (mm)	E (mm)	L (mm)	P (mm)	Max Pin
HD-1-11	0.45	0.7	0.635	50.8	1.0	9	1.27	40
HD-1-12	0.45	0.7	0.635	50.8	1.0	12	1.27	40
HD-1-13	0.45	0.7	0.635	50.8	1.0	14	1.27	40
HD-1-31	0.45	0.7	1.27	50.8	1.0	9	2.54	20
HD-1-32	0.45	0.7	1.27	50.8	1.0	12	2.54	20
HD-1-33	0.45	0.7	1.27	50.8	1.0	14	2.54	20
HD-2-11	0.6	0.7	0.635	50.8	1.0	9	1.27	40
HD-2-12	0.6	0.7	0.635	50.8	1.0	12	1.27	40
HD-2-13	0.6	0.7	0.635	50.8	1.0	14	1.27	40
HD-2-31	0.6	1.0	0.635	49.53	1.0	9	2.54	20
HD-2-32	0.6	1.0	0.635	49.53	1.0	12	2.54	20
HD-2-33	0.6	1.0	0.635	49.53	1.0	14	2.54	20
HD-4-31	1.0	1.4	1.27	50.8	1.3	9	2.54	20
HD-4-32	1.0	1.4	1.27	50.8	1.3	12	2.54	20
HD-4-33	1.0	1.4	1.27	50.8	1.3	14	2.54	20

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.
Telephone: +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz
Web: www.hightorquefasteners.co.uk

VAT Number: GB817097808 **Company Registration Number:** SC249029