


Male Pin for AA Series (Pitch=1.27, 2.54mm)

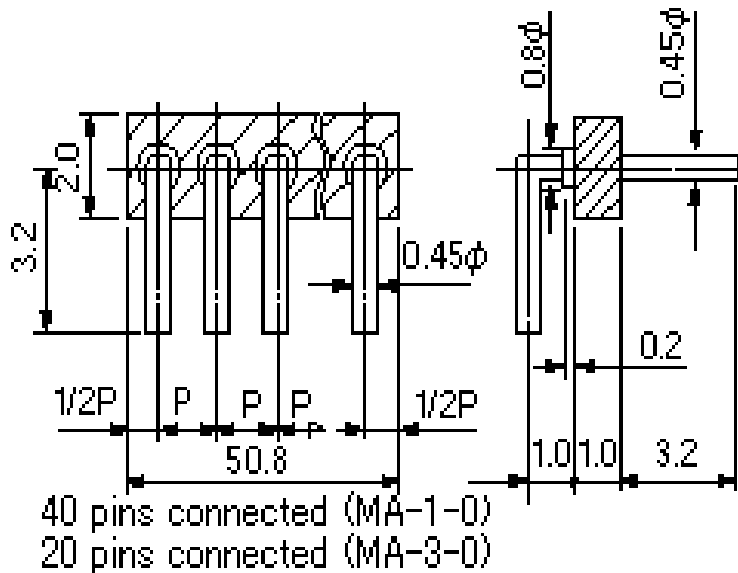

- 1.27 and 2.57mm pitch are available.
- Dielectric Strength....  
700V AC, DC 1min (MA-1-0)  
1000V AC, DC 1min (MA-3-0)
- Finish....Au plating over Ni
- Insulation Resistance....500M ohm or more
- Material....  
Resin part..PCT black (UL94V-0)  
Pin part..Phosphorus bronze
- Rated Current....2A
- Recommended Through-hole Diameter (phi mm)....0.6
- Temperature Range (Degrees Celcius)....-40 to +125

N/O	P (mm)	Max Pin
MA-1-0	1.27	40
MA-3-0	2.54	20

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

VAT Number: GB817097808 Company Registration Number: SC249029