


Long Pin Type (Pitch=2.54mm)

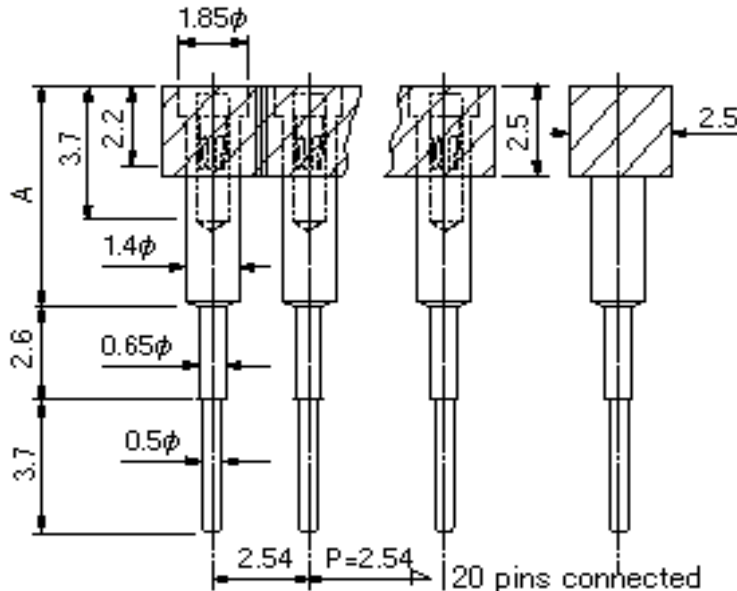

- 20 pins connected at 2.54mm pitch.
- Contact Resistance....10m ohm or less
- Dielectric Strength....1000V AC, DC 1min
- Finish....
- Body part..Au plating over Ni
- Contact part..Au plating over Ni
- Insulation Resistance....500M ohm or more
- Material....
- Resin part..PBT black (UL94V-0)
- Body part..Brass
- Contact part..Beryllium copper
- Mating/unmating (durability)....100 or more
- Mating/unmating Forces (1 pin)....70g or more
- Oscillation-proof....10 to 2000Hz at 15G
- Rated Current....1A
- Rated Voltage....125V AC, DC
- Recommended Male Pin Diameter (phi mm)....0.45 to 0.6
- Recommended Through-hole Diameter (phi mm)....0.8
- Shock-proof....150G
- Temperature Range (Degrees Celcius)....-40 to +125

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

**VAT Number:** GB817097808 **Company Registration Number:** SC249029

## Fastener and Component Solutions

N/O	A (mm)	Finish Contact	Finish Body
WM-6	6.0	Au p	Sn p
WM-60	6.0	Au p	Au p
WM-8	8.0	Au p	Sn p
WM-80	8.0	Au p	Au p
WM-10	10.2	Au p	Sn p
WM-100	10.2	Au p	Au p
WM-12	12.0	Au p	Sn p
WM-120	12.0	Au p	Au p
WM-15	15.0	Au p	Sn p
WM-150	15.0	Au p	Au p

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

**VAT Number:** GB817097808 **Company Registration Number:** SC249029