


Male Pin for PC Series

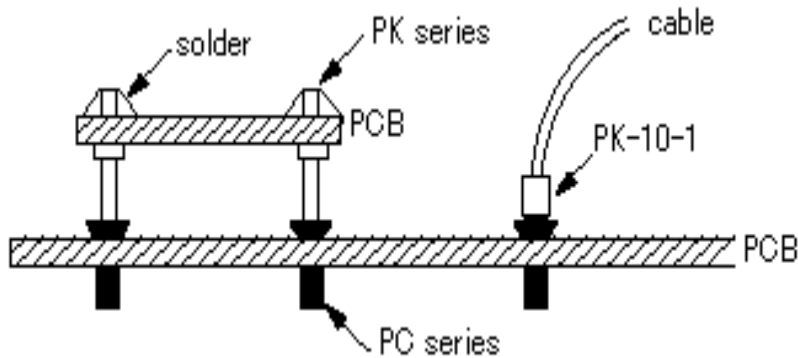

- Use it for assembling option board or taking out signal line by combining with PK and PC series.
- Finish....Au plating over Ni
- Material....Brass

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

**VAT Number:** GB817097808 **Company Registration Number:** SC249029

## Fastener and Component Solutions

N/O	A (phi mm)	B (phi mm)	C (phi mm)	L (mm)	Recommended Through-hole Diameter (mm)	Applicable Socket Pin
PK-1-1	0.3	0.45	0.85	3	0.5	PC-11
PK-2-1	0.45	0.45	0.85	3	0.5	PC-23, 10
PK-2-2	0.45	0.45	0.85	6	0.5	PC-23, 10
PK-3-1				3	0.8	PC-23, 10
PK-3-2				5	0.8	PC-23, 10
PK-3-3				10	0.8	PC-23, 10
PK-4-1	1.0	0.9	1.3	5	1.0	PC-4
PK-4-2	1.0	0.9	1.3	10	1.0	PC-4
PK-5-1	0.8	0.75	1.3	5	0.8	PC-5
PK-5-2	0.8	0.75	1.3	10	0.8	PC-5
PK-6-1	1.3	1.2	1.8	5	1.3	PC-6
PK-6-2	1.3	1.2	1.8	10	1.3	PC-6
PK-10-1	Crimp cable	Crimp cable	Crimp cable	Crimp cable	Crimp cable	PC-23, 10

High Torque Distribution Ltd, 6 & 7 Wren Court, Strathclyde Business Park, Bellshill ML4 3NQ, Scotland, UK.  
**Telephone:** +44 (0)1698 749749 **Fax:** +44 (0)1698 749206 **Email:** sales@hightorque.biz  
**Web:** www.hightorquefasteners.co.uk

**VAT Number:** GB817097808 **Company Registration Number:** SC249029